

Optical Protection Switch

OS-4121

For Automatic network path protection.

The OS-4121 is an optical path protection switch, providing a self healing network. This optic switch detects loss of optical power in the primary optical path and automatically switches to the secondary (backup) path. When the primary link is restored, the network path is restored to the primary path. The optical protection switch can be controlled via three methods; front panel manual switch, remote control signal, or the automatic internal monitoring circuitry.

The optical path through the units is purely optical; i.e. there is no optical to electrical to optical conversion. So there is no electrical loss or electrical bandwidth limit on the fiber optic path. Applications include telecom, datacom, ATM, and CATV systems.



Technical Specifications


Switching Time	< 10 ms
Back Reflection	< -50 dB
Insertion Loss	< 1.5 dB
Cross Talk	< -50 dB
Switch Life cycle	> 1 Million cycles
Switch sensitivity	Selectable from -20 to -38 dBm
Sensitivity Data rate	DC to 3 Gb/s
Operating Wavelength	850/1310 or 1310/1550nm
Optical Connectors	ST, SC, or FCPC
Operating Temperature	0° to +70°C
Power Requirements*	11-24 VAC/DC @150 mA
Size (mm)	5.0" (127) x 3.0" (76) x 1.0" (25.4)

* -48VDC only models available by request.

Note that all specifications are subject to change without prior notice.

Important Features

- **Switching time < 10 ms**
- **Fail-safe return to primary with loss of power**
- **Single model for stand alone or rack mount**
- **Multimode or single-mode versions**
- **Power and Switch status indicators**

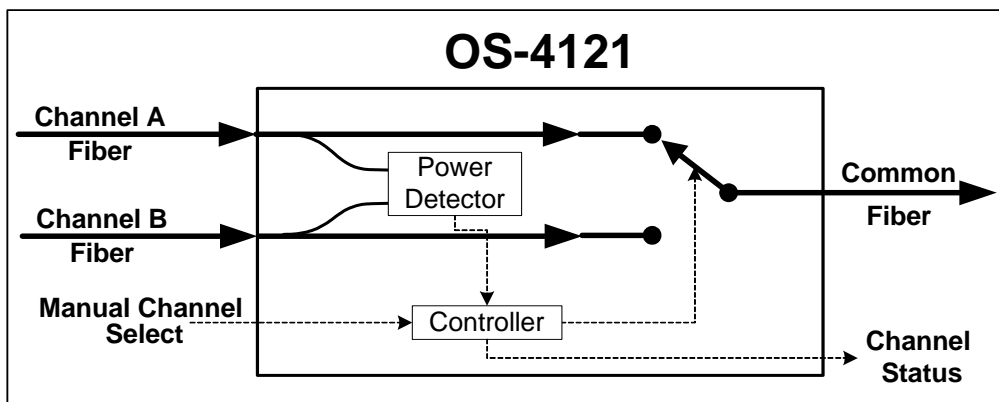

Ordering Information; OS-4121-# where "#" = Wavelength/Fiber/Connector

-3 = 850/1310nm Multi-mode ST/PC -4 = 850/1310nm Multi-mode- SC/PC
-5 = 1310/1550nm Single-mode SC/PC -7 = 1310/1550nm Single-mode FC/PC

LuxLink™
www.luxlink.com

166 Haverford Road
Hicksville, NY 11801
USA 516-931-2800