

**For Contact Closure or Status Monitoring Applications**

The **LiteLink**® CT/CR-7016 system consists of the CT-7016 transmitter and CR-7016 receiver. Both units utilize digital encoding techniques to transmit and receive eight separate contact closures over a single optical fiber conductor.

The CT-7016 may be activated by dry contacts or TTL signals and the CR-7016 will reproduce these inputs as isolated output contact closures corresponding to the respective input signal. All inputs are transient protected against excessive surges present on the signal and power leads. The unit is completely fail-safe in that a loss of operating power or a broken fiber will force all contacts to the open condition. Integral indicators are provided on both units to continuously indicate the link and contact closures status as well as proper operating power thereby making system troubleshooting simple.

**Technical Specifications**

Number of Channels	16
Transmitter Input	Dry Contact Closure or TTL
Tx Input Impedance	3 K Ohms maximum
Receiver Output	Isolated Relay Contacts
Output Contact Ratings	0.5 A @ 125 VAC (62.5VA) 1.0 A @ 24 VDC
Output Contact carry current	2.0 A maximum
Output Contact Resistance	100 milli-ohms maximum
Speed of Response	10 ms maximum
Operating Wavelength	850nm, 1310nm or 1550nm
Optical Loss Budget	0-10 dB (multimode) 0-12 dB (single-mode)
Optical Connectors	ST (multimode) FCPC (single-mode)
Signal Connectors	Removable Terminal Block
Operating Temperature	-35° to +75°C
Humidity	<95% non condensing
MTBF (per MIL HBK 217)	>120,000 hours
Power Requirements	11-24 VAC/DC @300 mA
Physical Size (mm)	5.0" (127) x 3.0" (76) x 2.23" (56.6)

Note that all specifications are subject to change without prior notice.

**Important Feature**

- **16 Independent Contacts on One Fiber**
- **Signal, Power, & Link Indicators**
- **Multimode or Single-mode versions**
- **Stand-alone, DIN or Rack Mountable (same unit)**


**Ordering Information**

Transmitter	CT-7016-X
Receiver	CR-7016-X

"X" = Wavelength/Fiber  
 -1 = 850nm Multimode  
 -3 = 1310nm Multimode  
 -7 = 1310nm Single-mode  
 -9 = 1550nm Single-mode

For stand-alone operation order a PS- 205 power supply for each unit.

For rack mounted operation all operating power is provided by power supply used with the rack-mounting panel.

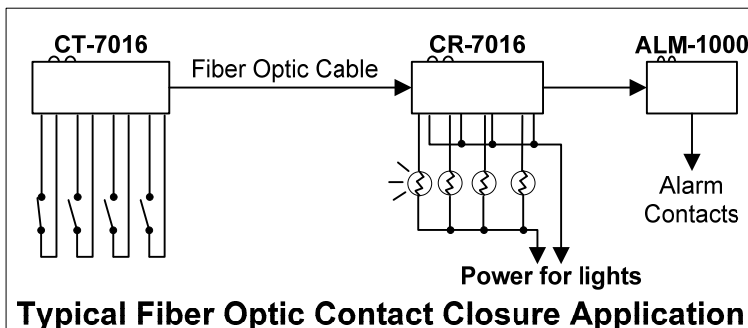

Fiber Optic Transmission Systems

www.Liteway.com  
 USA 516-931-2800

